Rev	Description	Ву	Date
Α	Released for production	AG	17-Mar-21

## **ELECTRICAL SPECIFICATIONS @ 25°C**

L: 200µH±10% @ 10kHz, 1Vrms

 Isat:
 ΔL≤30% @ 135Adc

 DCR:
 3.4mΩ Max


 Irms:
 ΔT≤40°C @ 130A

Hipot: 2kVrms, 1mA Max, 10s (wdg to bracket)

Operating Temp: -40°C to +150°C


RoHS Compliant: Yes

## **SCHEMATIC**



## MARKING

MPS HWI55P1-130A-201B\_REV# Date Code

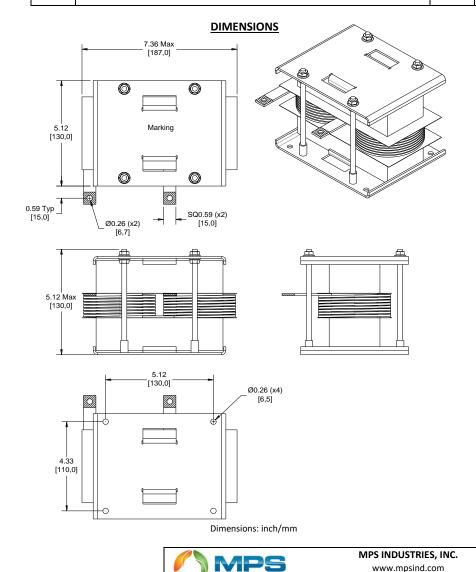

## **Notice of Proprietary Property**

.XX ± .010" [0,254mm]

.XXX ± .005 [0,13mm]

These drawings and specifications are the property of MPS and shall not be, reproduced, copied or used as the basis of manufacture of sale of apparatus without express written authorization

without express written authorization

Dimensions

Unless otherwise specified

CHECKED BY:

AG 17-Mar-21 AY 17-Mar-21 SIZE Part Number

Α

Description

Power Inductor

Tel: (310) 325-1043 Fax: (310) 325-1044

HWI55P1-130A-201B

WEIGHT: XX gms SHEE

LB REV
A

