


Rev	Description	By	Date
1	Preliminary	TM	14-Oct-20


### ELECTRICAL SPECIFICATIONS @ 25°C

L(per wdg): 6.6mH Min @ 10kHz, 0.1Vrms  
 DCR(per wdg): 8.0mΩ Max  
 Irms: ΔT≤40°C @ 16A  
 Turns Ratio: 1:1:1±0T  
 (1-2):(3-4):(5-6)  
 Polarity: 1, 3 and 5 are in phase  
 Hipot: 2kVac, 1mA Max, 10s (wdg to wdg)  
 Operating Temperature: -40 °C to +125 °C  
 RoHS Compliant: Yes

### DIMENSIONS

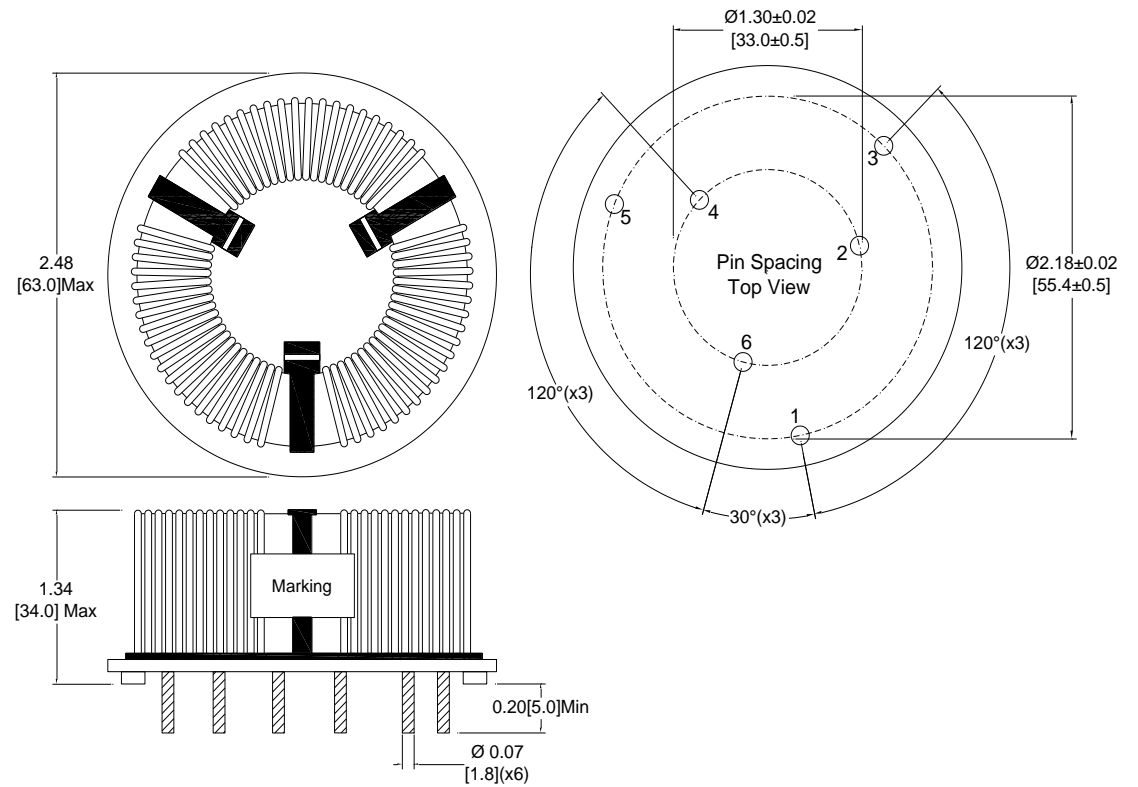

### SCHEMATIC



### MARKING

MPS  
 P57TP50H-662\_Rev  
 Date Code

Dimensions: inch/[mm]

#### Notice of Proprietary Property

These drawings and specifications are the property of MPS and shall not be reproduced, copied or used as the basis of manufacture of sale of apparatus without express written authorization

<b>Dimensions</b> Unless otherwise specified .XX ± .010" [0,254mm] .XXX ± .005" [0,13mm]	DRAWN BY: CHECKED BY:	TM AG	14-Oct-20 27-Oct-20	SIZE <b>A</b>
---	--------------------------	----------	------------------------	------------------



MPS INDUSTRIES, INC.

[www.mpsind.com](http://www.mpsind.com)

Tel: (310) 325-1043 Fax: (310) 325-1044

Description

**3-Phase CMC**

Part Number

**P57TP50H-662**

REV

**1**

WEIGHT: 90 gms

SHEET: 1 OF 1