


Rev	Description	By	Date
1	Preliminary	SO	16-Jun-25

ELECTRICAL SPECIFICATIONS @ 25°C

L(1-2//3-4):	1240.0μH±15% @ 10kHz, 1Vrms
Isat(1-2//3-4):	ΔL≤10% @ 17.5Adc
	ΔL≤20% @ 26Adc
	ΔL≤30% @ 33.5Adc
Irms(1-2//3-4):	ΔT≤40°C @ 19Adc
	ΔT≤60°C @ 24.5Adc
DCR(1-2//3-4):	34.5mΩ Max
Insulation Class:	Class H 180°C Min
RoHS Compliant:	Yes

SCHEMATIC




MARKING

MPS
PX1391-122_Rev#
Date Code

NOTE

Connect 1,4 and 3,2 for full load operation.

DIMENSIONS

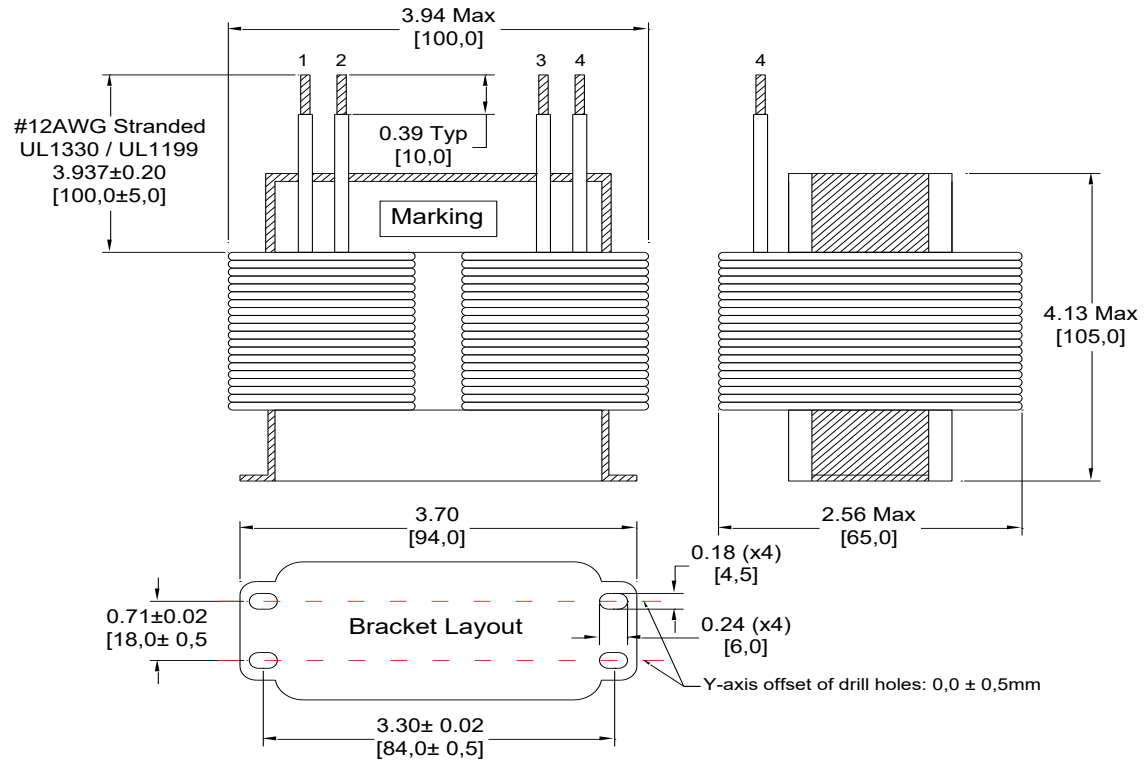

Dimensions: inch/[mm]

Notice of Proprietary Property


These drawings and specifications are the property of MPS and shall not be reproduced, copied or used as the basis of manufacture of sale of apparatus without express written authorization

Dimensions	DRAWN BY:	SO	16-Jun-25	SIZE
Unless otherwise specified .XX ± .010" [0,254mm] .XXX ± .005" [0,13mm]	CHECKED BY:	SO	16-Jun-25	A

 MPS INDUSTRIES, INC. www.mpsind.com Tel: (310) 325-1043 Fax: (310) 325-1044	
Description	Power Inductor
Part Number	PX1391-122
WEIGHT: XX gms	SHEET: 1 OF 2
REV	1

Rev	Description	By	Date
1	Preliminary	SO	16-Jun-25

DC Bias Characteristics

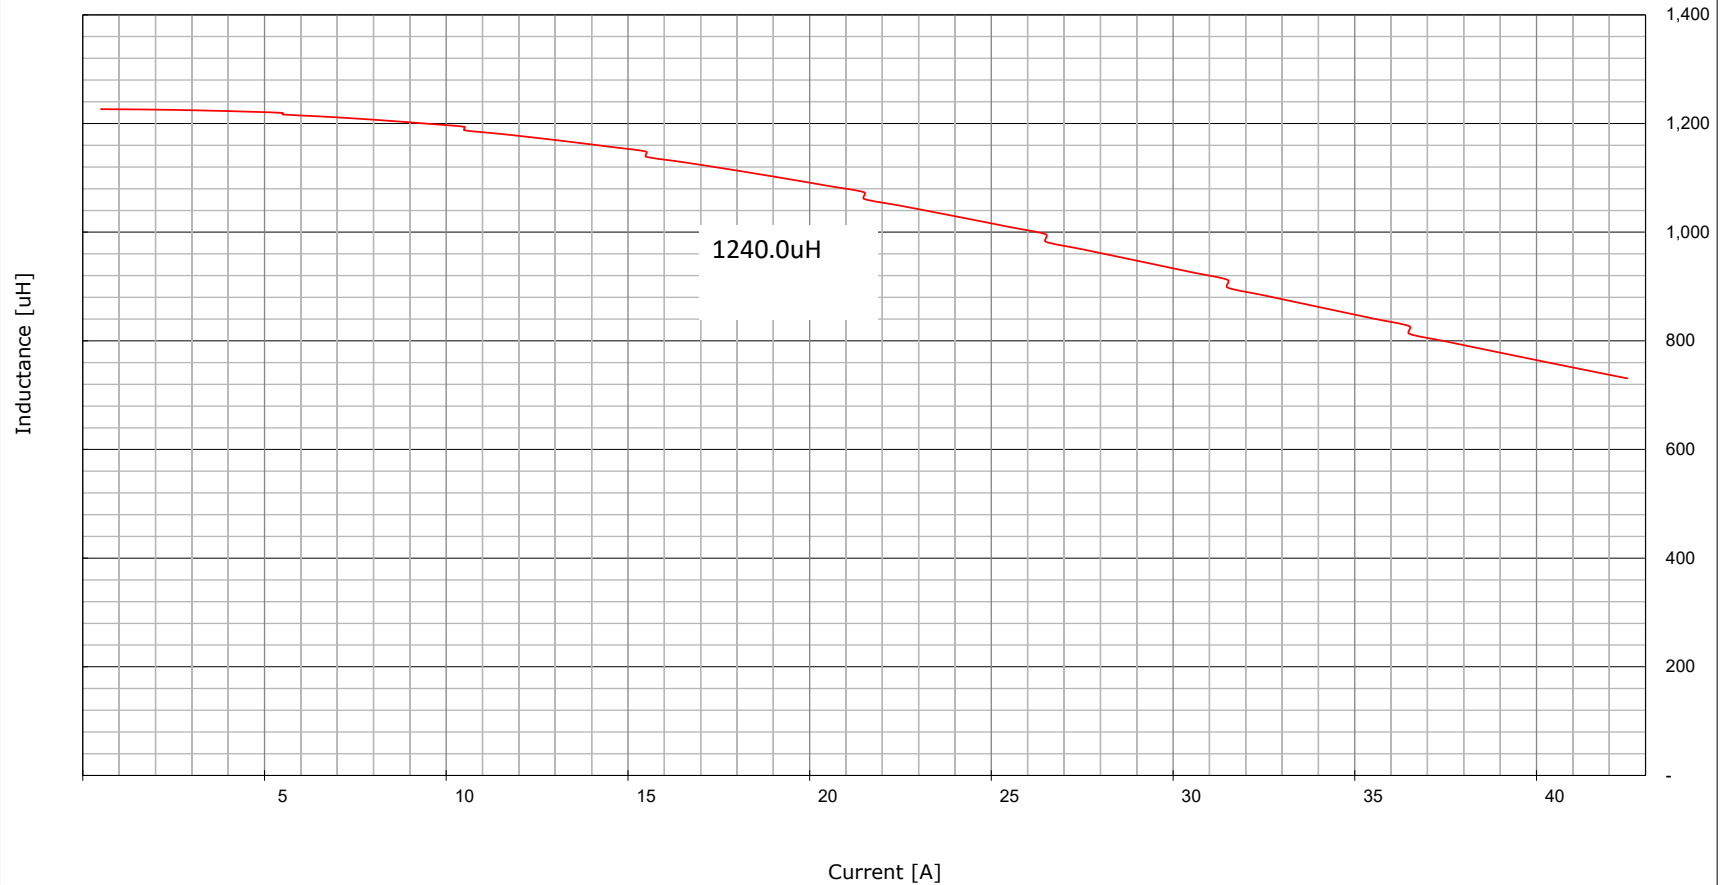

Notice of Proprietary Property

These drawings and specifications are the property of MPS and shall not be reproduced, copied or used as the basis of manufacture of sale of apparatus without express written authorization

Dimensions Unless otherwise specified .XX ± .010" [0,254mm] .XXX ± .005" [0,13mm]	DRAWN BY:	SO	16-Jun-25	SIZE	Part Number			REV
	CHECKED BY:	SO	16-Jun-25	A	PX1391-122			1
					SCALE: X:X		WEIGHT: XX gms	SHEET: 2 OF 2



MPS INDUSTRIES, INC.

www.mpsind.com

Tel: (310) 325-1043 Fax: (310) 325-1044

Description

Power Inductor

1