


Rev	Description	By	Date
1	Preliminary	SO	3-Mar-25


ELECTRICAL SPECIFICATIONS @ 25°C

L(1-3 with 2-4 shorted):	2380.0μH±15% @ 10kHz, 1Vrms
Isat(1-3 with 2-4 shorted):	ΔL≤10% @ 12.5Adc
	ΔL≤20% @ 19Adc
	ΔL≤30% @ 24Adc
Irms(1-3 with 2-4 shorted):	ΔT≤40°C @ 23Adc
	ΔT≤60°C @ 29Adc
DCR(1-3 with 2-4 shorted):	48.0mΩ Max
Insulation Class:	Class H 180°C Min
RoHS Compliant:	Yes

DIMENSIONS

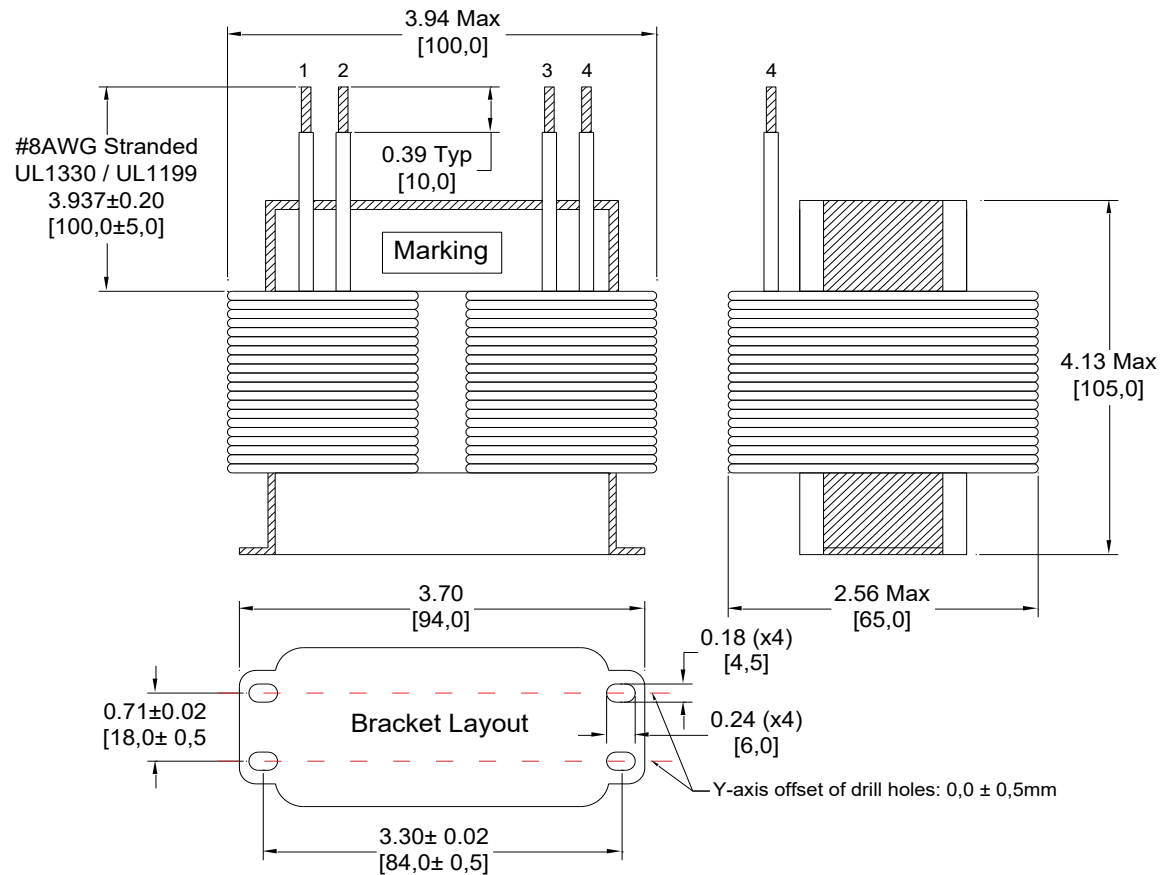

SCHEMATIC

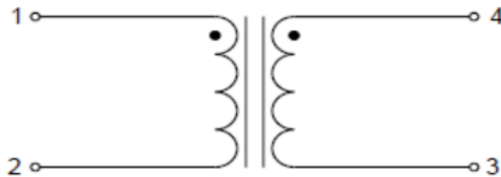

Note: Connect coils in series for a full load operation

MARKING

MPS
PX1391-242_Rev
Date Code

Dimensions: inch/[mm]

Notice of Proprietary Property

These drawings and specifications are the property of MPS and shall not be reproduced, copied or used as the basis of manufacture of sale of apparatus without express written authorization

Dimensions Unless otherwise specified .XX ± .010" [0,254mm] .XXX ± .005" [0,13mm]	DRAWN BY: CHECKED BY:	SO SO	3-Mar-25 28-May-25	SIZE A	Description Power Inductor	REV 1
					Part Number PX1391-242	WEIGHT: XX gms SHEET: 1 OF 2




MPS INDUSTRIES, INC.

www.mpsind.com

Tel: (310) 325-1043 Fax: (310) 325-1044

Rev	Description	By	Date
1	Preliminary	SO	3-Mar-25

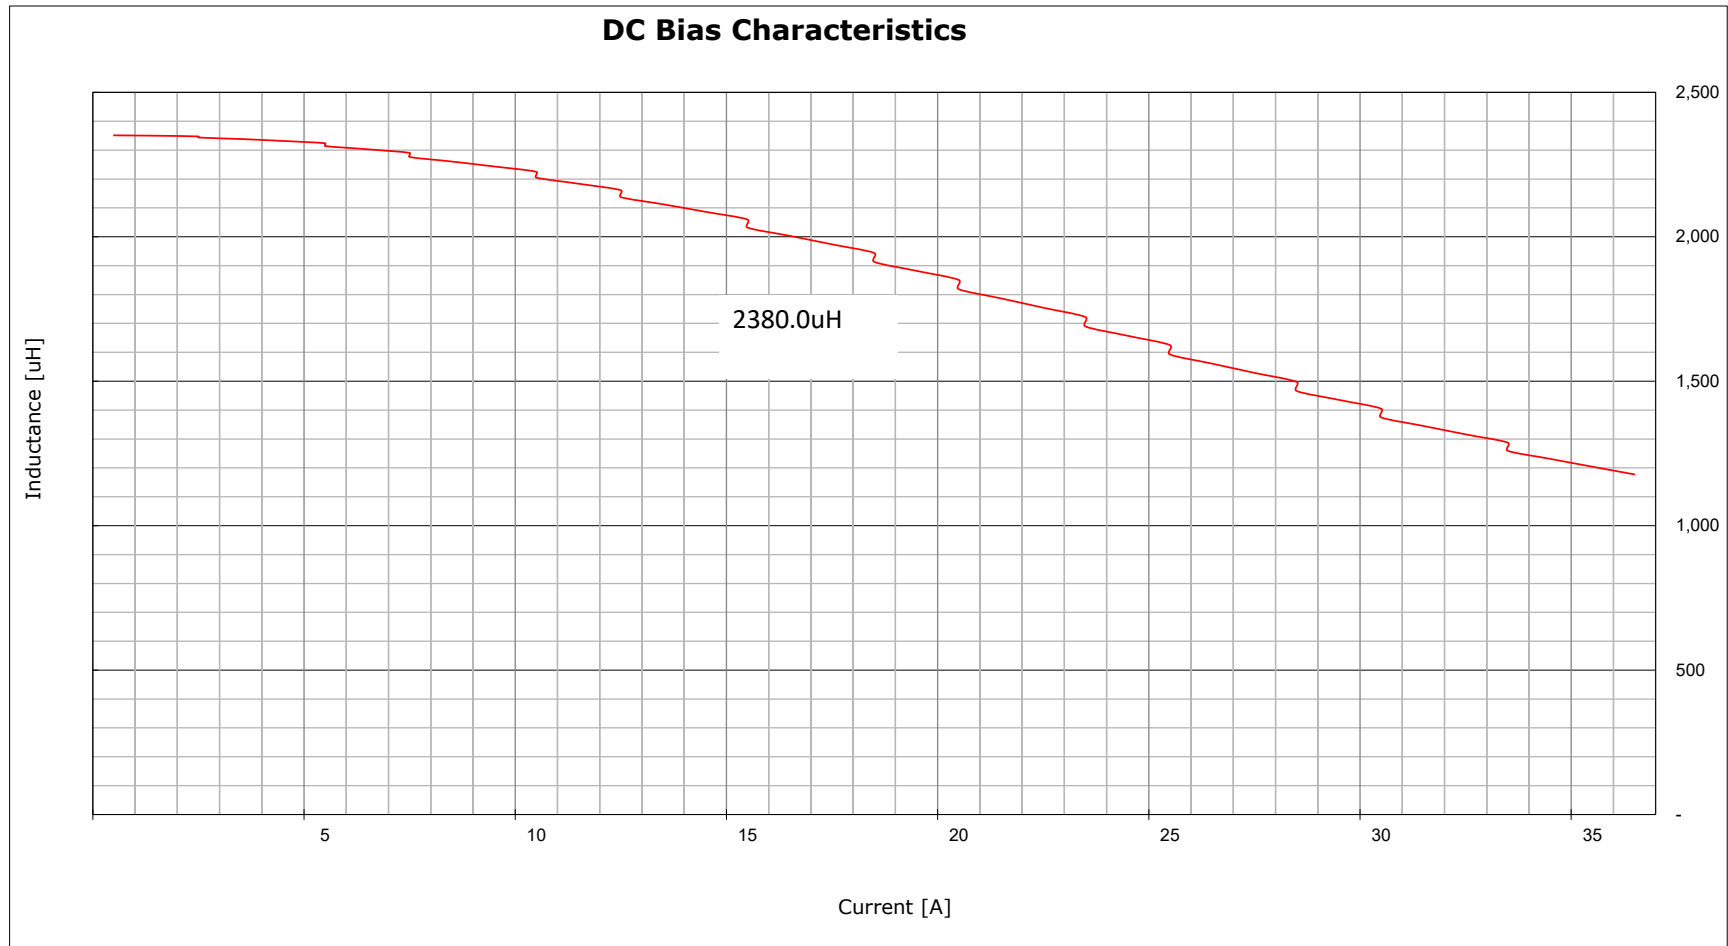

Notice of Proprietary Property

These drawings and specifications are the property of MPS and shall not be reproduced, copied or used as the basis of manufacture of sale of apparatus without express written authorization

Dimensions Unless otherwise specified .XX ± .010" [0,254mm] .XXX ± .005" [0,13mm]	DRAWN BY:	SO	3-Mar-25	SIZE	Part Number			REV
	CHECKED BY:	SO	28-May-25	A	PX1391-242			1
					SCALE: X:X		WEIGHT: XX gms	



MPS INDUSTRIES, INC.

www.mpsind.com

Tel: (310) 325-1043 Fax: (310) 325-1044

Description

Power Inductor